


PARTS LIST:

UNITS	REF #	DESCRIPTION
8	1	Poles, 4" square steel x 14'
8	2	24" Aluminum ground sleeve for 4" square pole
8	3	Black top cap
4	4	Corner pole collars 4-1/2" sq. x 4"
2	5	Double pole collars 4-1/2" sq x 4"
2	6	Collar with eyebolt
4	7	Crossbars 2" O.D. x 14'8"
12	8	Round collars with 2" eyebolt
14	9	TB-12, 12" Turnbuckles
40	10	Cable Clamps, 1/4"
2	11	300' 1/4" Cable Spool
200		8mm Carabiner Clips

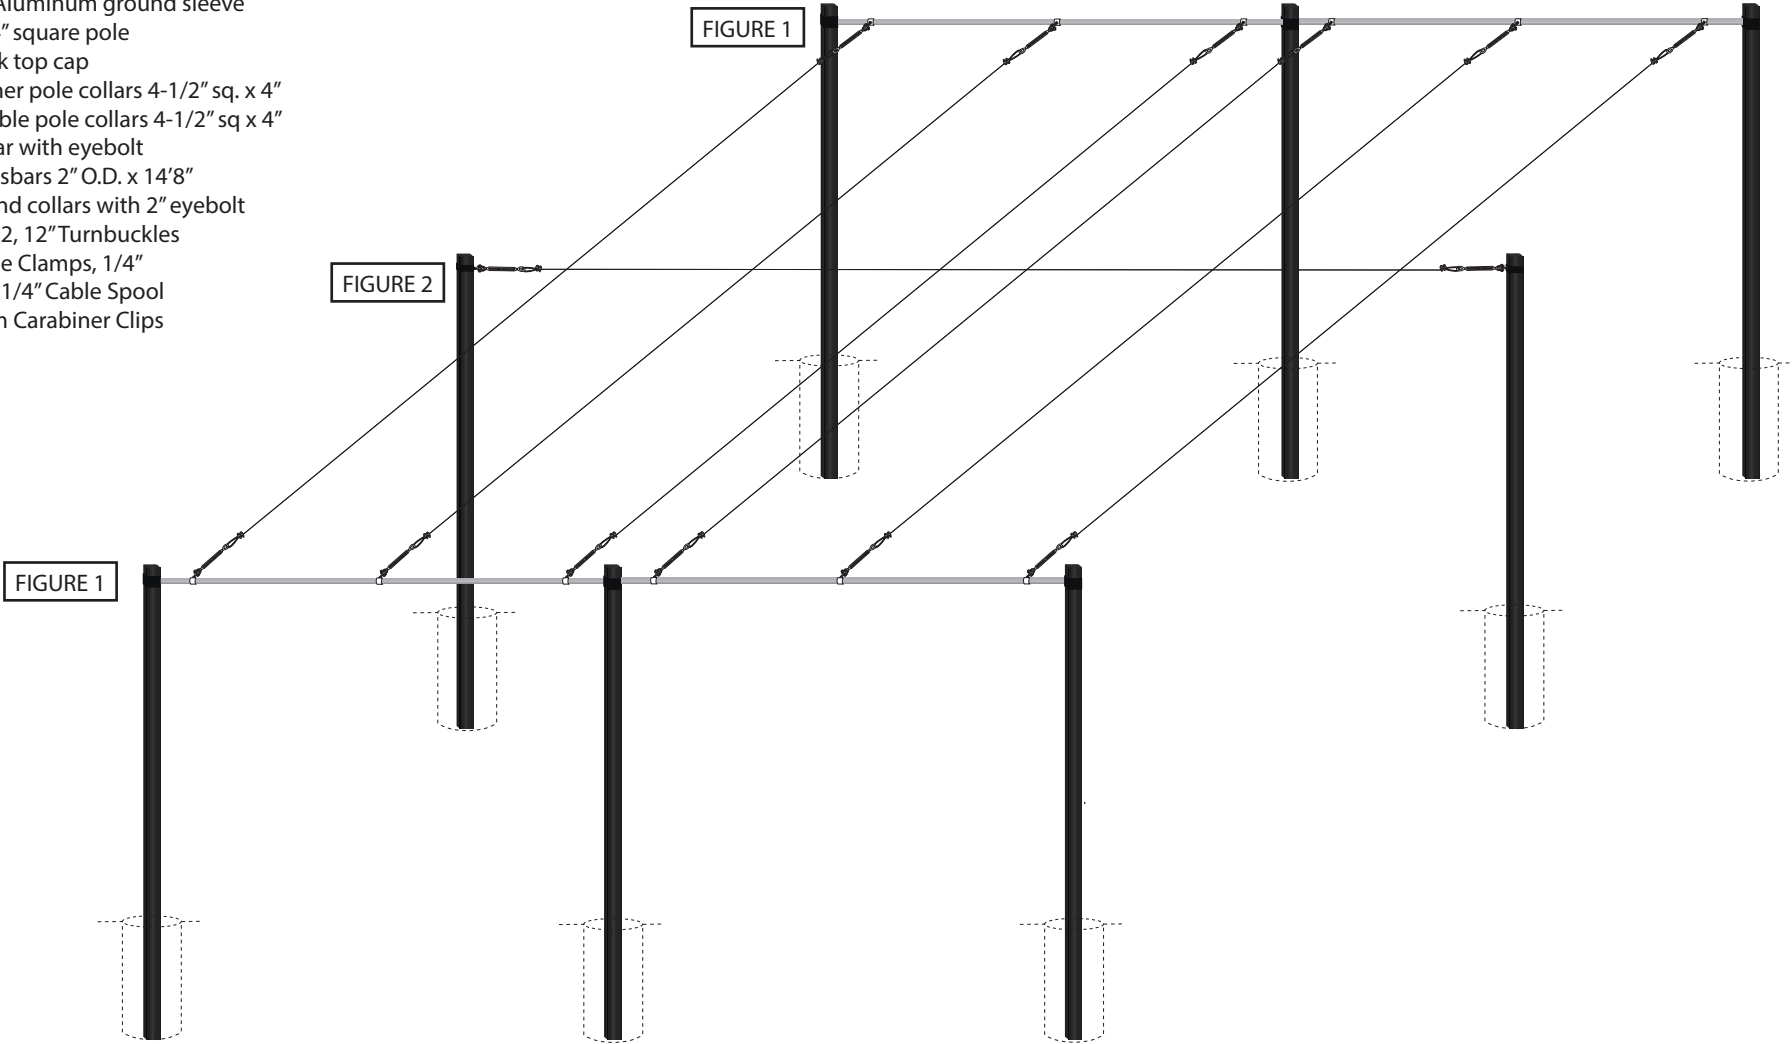

POST LAYOUT/SPACING:

Post spacing for the width should be 15' (center-to-center of poles).

Post spacing for the Middle Cross-Cable Section is 32' - 34'.

For the length, add 5' to the net length (usually 55', 70' or 75' - so posts would be 60', 75' or 80').

HARDWARE & NET INSTALLATION:

1. The (6) long cables should be cut 5' longer than the post spacing to allow for making loops.
2. The (4) end cables should be cut 5' longer than the width between the end posts.
3. Install the hardware as shown in the main layout diagram and Figures 2 & 3.
4. Unroll the nets and lay on the ground inside the frame, locate the top border ropes.
5. Starting at one corner attach the top ropes of the net to the cables with Carabiner Clips, spaced every 3' per Figure 4.
6. Repeat for the other net.
7. After nets are attached to the cables and pulled to full length, attach to Center Support Cross Cable.

FIGURE 1

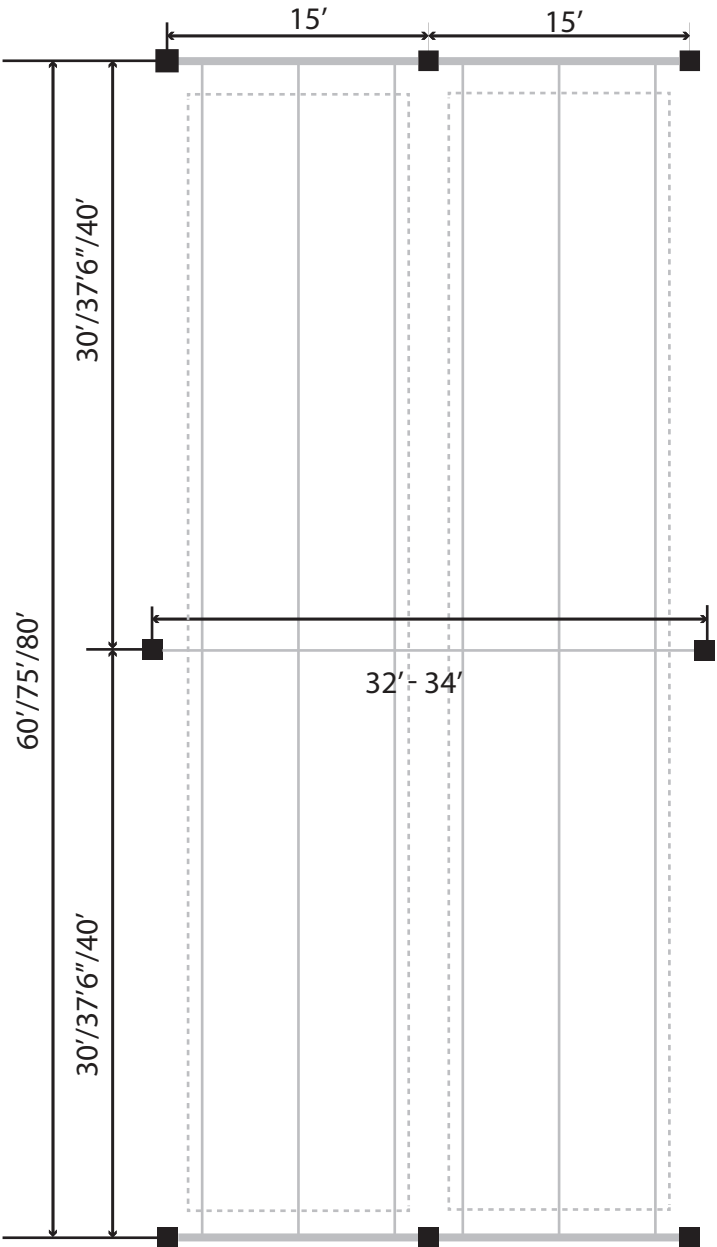


FIGURE 2 - END SECTIONS WITH CROSSBARS  
NOT TO SCALE

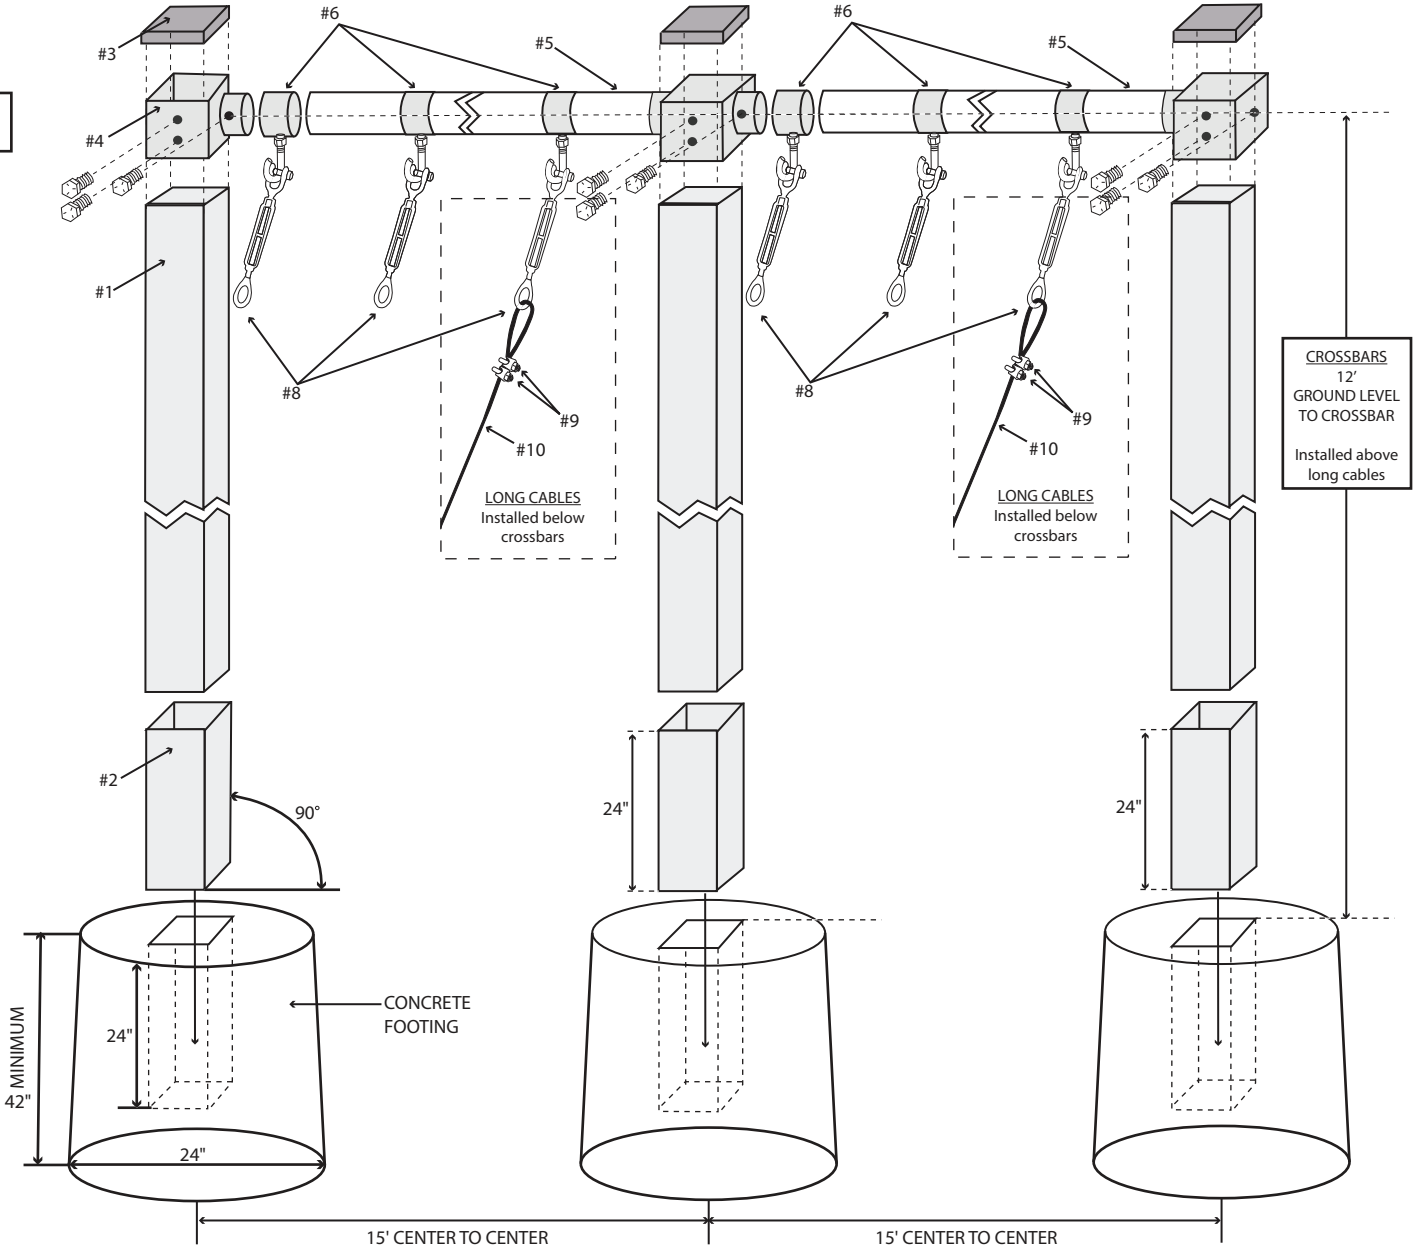


FIGURE 3 - MIDDLE SECTION WITH CROSS CABLE  
NOT TO SCALE

