




Parts List:

- | | |
|------------------------------|------------------------------|
| (6) - 1/2" x 6" Eye Bolts | (6) - TB-12, 12" Turnbuckles |
| (1) - 500' Spool 1/4" Cable | (12) - 1/4" Cable Clamps |
| (2) - 500' Spools 1/8" Cable | (120) - 1/8" Cable Clamps |
| (70) - Steel C-Snaps | (30) - Split Bracket Pulleys |

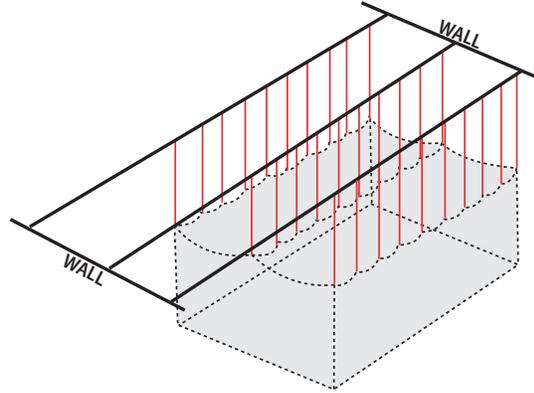



Eye Bolt Installation

Attach the (6) eye bolts at each end of your gym walls. The height and horizontal placement of your eye bolts will depend on your ceiling height and desired tunnel width. It is suggested to place your eye bolts as close as possible to the ceiling. The length of the vertical cables should then be determined to allow the tunnel net to hang with and extra 1' - 1-1/2' of netting on the facility floor.

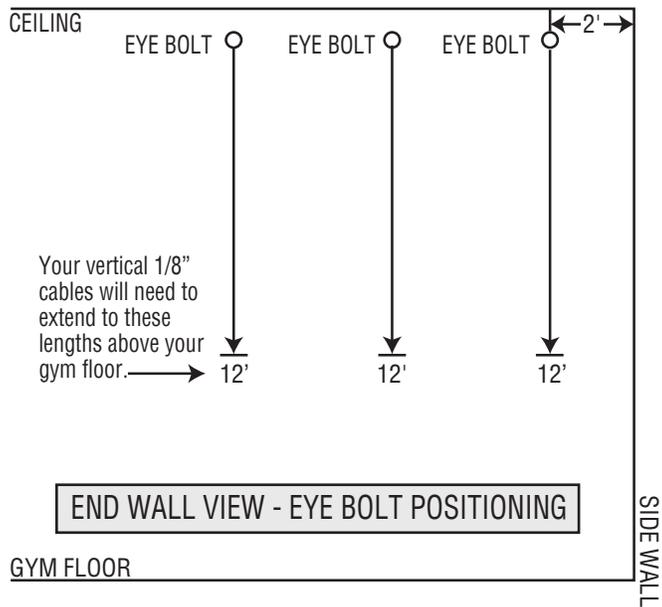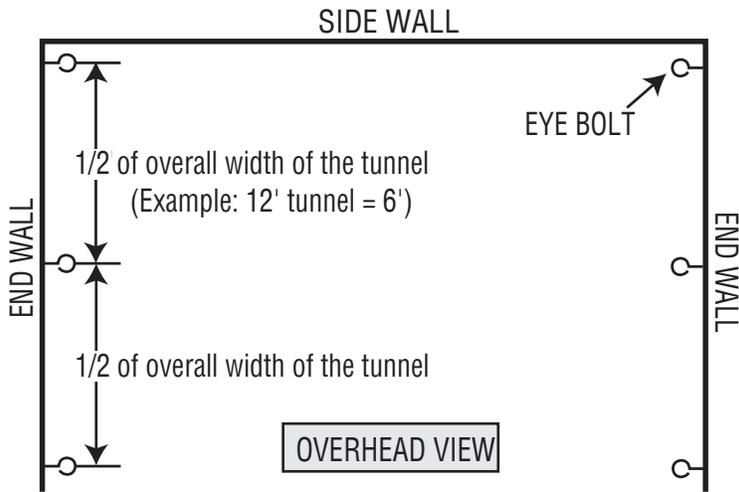


Installing Horizontal Support Cables.

1. Cut (3) 1/4" steel cables to the appropriate length.
NOTE: You should allow for extra cable length. If needed, you can always cut off excess cable.
2. Run one end of a cable through the turnbuckle eye and secure using a 1/4" cable clamp. Cable end can be taped to prevent any fraying.
3. Hook the turnbuckle on to the installed eye bolt extending from the end wall.
4. Tighten the turnbuckle to provide tension to hold up net.
5. Repeat steps 2 - 4 at each installed eye bolt.

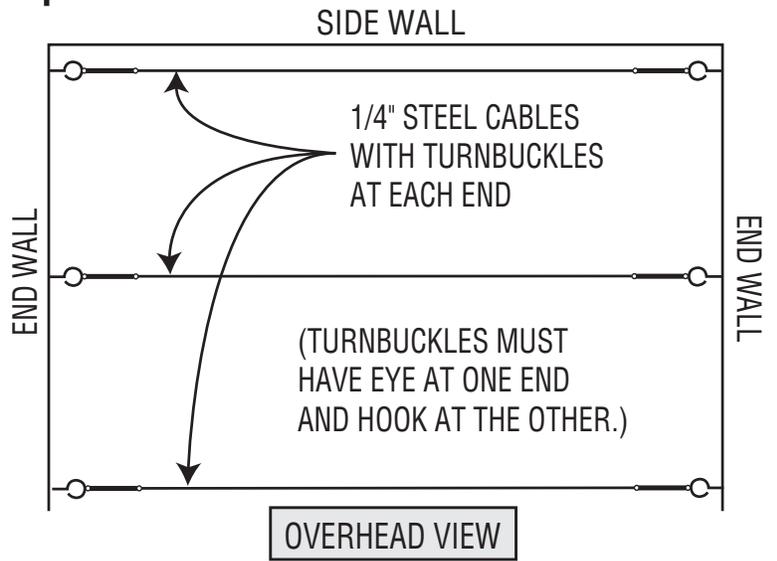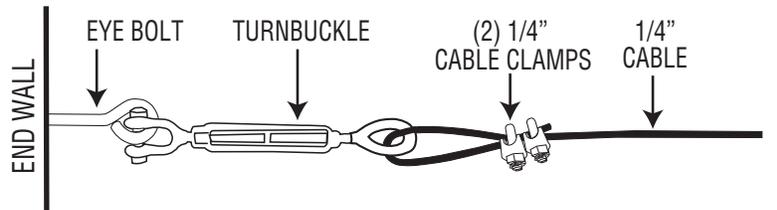



Hang Vertical Cables

- Slide (10) Split Bracket Pulleys on each of the (3) Horizontal support cables.

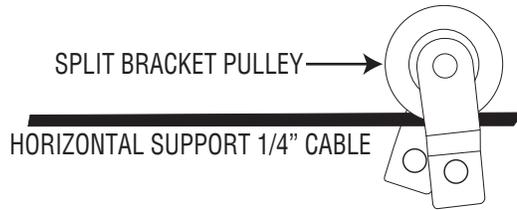

- Cut your (30) 1/8" vertical cables to your determined length from the eye bolt installation. Loop and secure them at each end with (2) 1/8" cable clamps. **NOTE:** Before cutting the cable lengths be sure to account for extra cable to make end loops. Make sure to allow for 1'6" of netting to rest on the facility floor.
- Attach a metal c-snap to each end of the vertical cables.
- While using a ladder or platform and clip each vertical cable clamp to the installed split brackets on the horizontal support cables.



OPTIONAL SLOPE Have the center of the net, for it's entire length at 12' high. The sides of the net should be set at 10-1/2' high, leaving 18" of net on the facility floor to keep batted balls inside the enclosed area.

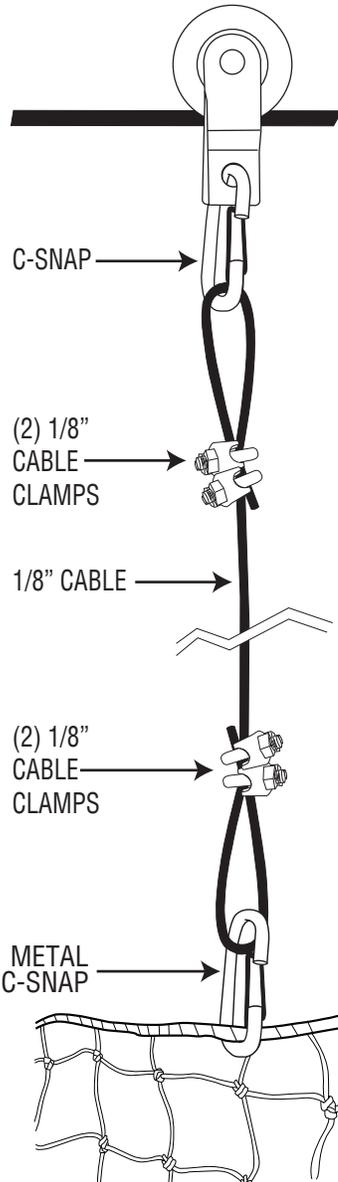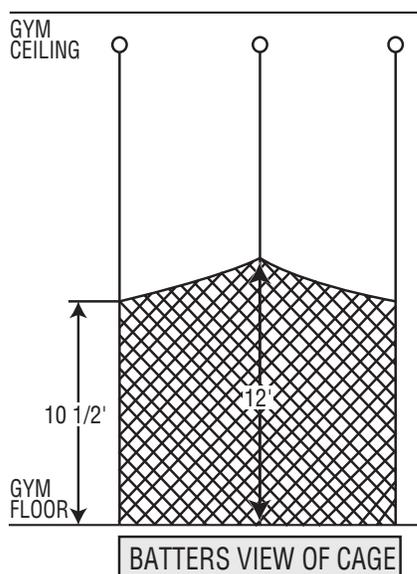

Installing Batting Tunnel Net

- Stretch the batting tunnel net on the ground underneath the cables
- Start at one end while on a ladder or platform. On the corner of the tunnel, secure the rope border to the first metal c-snap and bottom cable loop.
- Continue attaching the rope border to the c-snaps every 6' - 8' depending on length of net. (10) drop cables per length.
- Repeat steps 2 and 3 for the opposite side of the net and then for the middle.

NOTE: It's easiest to hang the net with a partner and have them "feed" the net to you as you progress down the length of the cable. You should only have to go up and down the ladder (3) times, once for each of the cables.

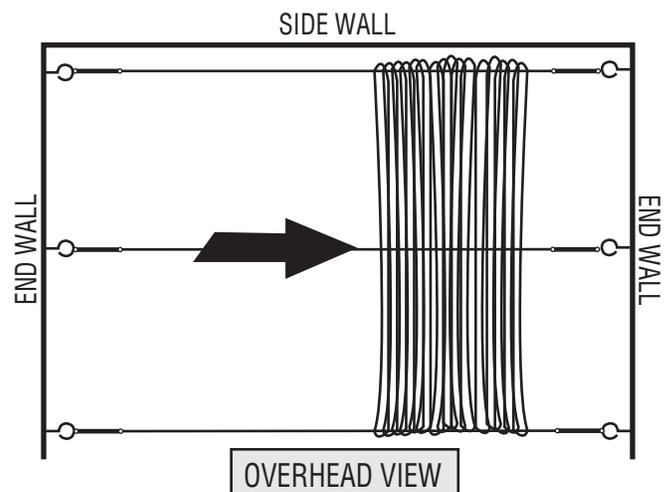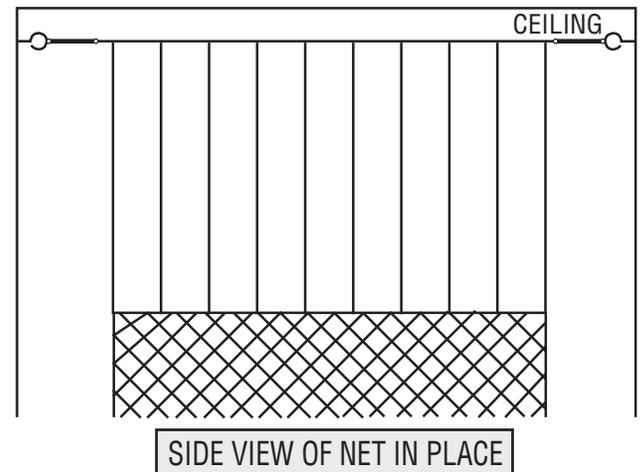

To Store your net, simply slide it along the cables to side wall.